


COMEUP

CWG 10151

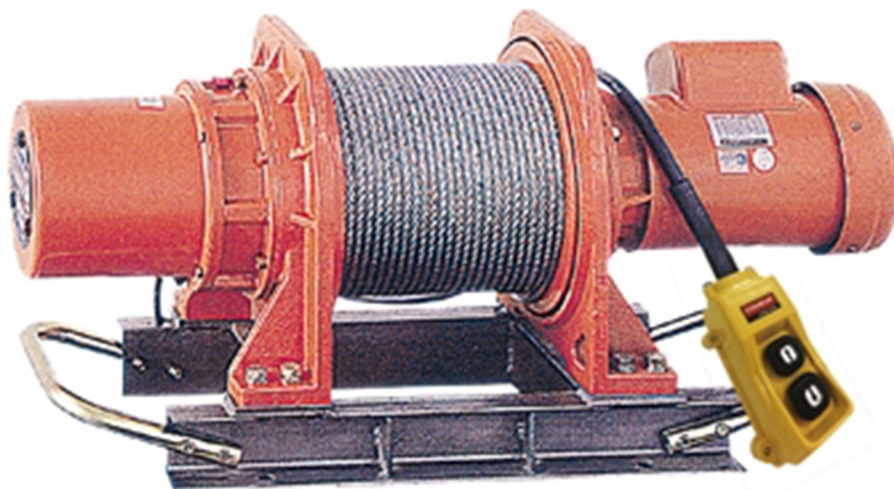

- **Lifting capacity:** 400 kg at wire rope top layer
- **Lifting speed:** 12 – 18 m/min
- **Power source:** 1 phase, 220-240V
- **Motor rating IP44:** 1.5 kw x 4 poles induction brake motor
- **Gear ratio:** 57:1
- **Maximum lifting height:** 58 m
- **Braking methods:** Electromagnetic
- **Wire rope:** 9 mm x 60 m
- **Drum length:** 240 mm
- **Drum dia.:** 140 mm
- **Drum flange dia.:** 280 mm
- **Mounting bolts pattern:** 400 mm x 325 mm
- **Net weight, kg (standard version) :** 120 kg
- **Gross weight :** 148 kg
- **Body dimension, (L x D x H) :** 937 x 367 x 425 mm
- **Box dimension, (L x D x H) :** 1,090 x 470 x 590 mm

Standard Accessories

- Wire rope 9 mm x 60 m
- Weight hook CHW-0005
- Remote control, CPB-213
 - * Switch cord 3.5 mm² x 5C x 3 m
 - * Pendant switch CPB-213
- Base Plate

Option Accessories

- Remote control, PB-331
 - * Switch cord 3.5 mm² x 5C x 3 m
 - * Pendant switch PB-331 w/an emergency stop button
- Low voltage control ass'y LV-320
 - Remote control, PB-306
 - * Switch cord 1.25 mm² x 3C x 3m
 - * Pendant switch PB-306 w/an emergency stop button
 - Low voltage control, LV-320



Telephone: +44 (0)1482 620991
Email: sales@winchsystems.co.uk
Web: www.winchsystems.co.uk

Lifting Capacity, Lifting Speed and Rope Capacity:

Layer of Wire rope	Lifting Capacity, kg	Lifting Speed, m/min	Total Rope on the Drum, m
1 st	593	12	12
2 nd	529	13.3	26
3 rd	478	14.8	40
4 th	436	16.2	57
5 th	400	18	60

Note: Above performance ratings are based on 50Hz supply.

Pulling Load Capacity for Various Inclines in kg

Model	Level Surface	Gradient % inclines / angle in degrees				
		10% 60°	20% 11°	40% 25°	60% 31°	80% 39°
CWG-10151	3,000	1,600	1,200	800	620	550

Note:

1. All rating are based on the top layer. For each layer reduction on the drum pulling capacity is increased by 10%
2. Use a snatch block for double line operation, to increase line pull by approximately 85%
3. The pulling capacities are based on a pulling load and 15% has been allowed for friction (specific applications will vary)


Warning

The winch is not intended to be used in any manner for the movement or lifting of personnel.
The rated lifting capacity shown is based on the top rope layer on the drum
The rope winding on the drum shall remain 5 wraps from the drum

Warranty

Each new winch is guaranteed against defects in workmanship and material defects for a period of twelve months from date of purchase.
WIRE ROPES ARE NOT INCLUDED UNDER WARRANTY.

Dimension, mm/in:

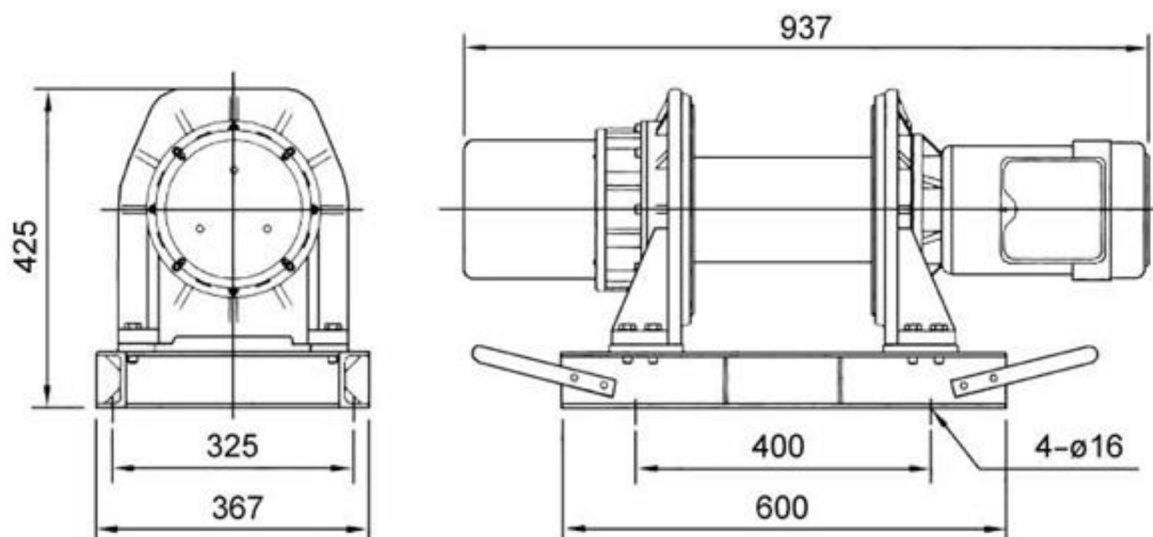

Telephone: +44 (0)1482 620991
Email: sales@winchsystems.co.uk
Web: www.winchsystems.co.uk